PIXIE Timer Control

#STCBT **Bluetooth**

Basic operation

- 1 click start /stop timer count down
- Long press for 3 seconds activate override-on mode
- 2 clicks when in timer mode, restart timer
- 4 clicks manual pairing
- 9 clicks rest device

Applications

Ideal for individual device and group timing control of extractor fans, heated towel rails, external lighting.

Whats in the box

1 x Timer Control, 1 x silicone adaptor/spacer, 3 x switch caps, installation instructions

Accessories

<u>DOES NOT</u> fit into PIXIE Ambience wall and faceplates. Does fit into a range of Australia wall plates.



Download the PIXIE and PIXIE PLUS Apps

App Store

GET IT ON Google Play



#STCBT PIXIE Timer Control



This is a Secondary PIXIE device designed to operate with one or a group of PIXIE devices (e.g. smart dimmer, smart switch or LED strip kit). Timer / Run-on-timer duration from 1 minute to 24 hours. Comes with Bluetooth Mesh Technology.

Features


- Requires Active + Neutral from any circuit
- Requires at least 1 PIXIE Master device to provide function
- Fit most branded switch plates
- The LED indicator will blink every 3 seconds to indicate timer mode is in operation.
- In the last 1 minute of timer mode, the LED indicator will flash quickly indicating imminent time out.
- Generation 1 product which is compatible with Gen 2 and Gen 3 products for timing control.

Electrical


220-240VAC
No connected load
0 to 40°
15 metres typical indoors $*_{*}$
IP20
(



*Subject to product capability, this size load may require the inclusion of the LOAD capacitor included in the product carton.

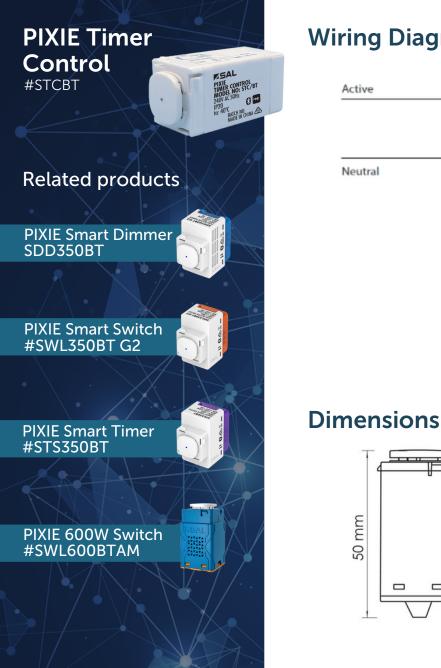

Wiring Diagram

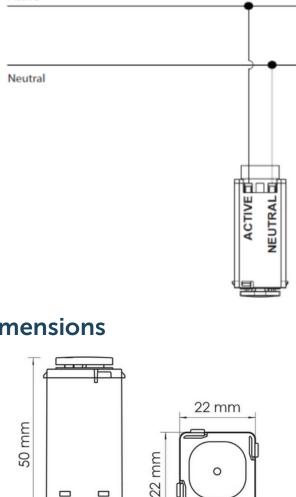

PIXIE fits in

PIXIE fits in to a huge range of Australian wall plates

SALL



App Store

Download the PIXIE and **PIXIE PLUS Apps** Get IT ON Google Play

PDF Prepared 23.7.2021 9:26am

© Copyright SAL - All Rights Reserved

Complete installation manual available at SAL National website.

SCAN ME

PIXE

PM

٦ŝ