

## PIXIE Smart RGB LED Strip Controller

#LT8915RGBBT



### ▶ Basic operation

- 1 click operate LED on/off
- To dim, long press and hold.
- 2 clicks go to maximum output
- 3 click change colour in white-red-green-blue-white order
- 4 clicks manual pairing
- 9 clicks reset device

Using 'control-button' on device and momentary inputs

### ▶ Applications

Residential dwellings for retrofit, renovation and new build; apartments; hotels and hospitality venues.

### ▶ Whats in the box

1 x RGB LED Strip Controller, installation instructions

### ▶ Accessories

Bell Press mechs from 3rd party for optional connection to bell-press inputs.



SCAN ME

Download the PIXIE and PIXIE PLUS Apps



#LT8915RGBBT

PIXIE Smart RGB LED Strip Controller



PIXIE LED strip controller enables dimming of most manufacturer's RGB LED strip via momentary switch, smart phone App or PIXIE Multifunction controllers. Comes with 24hour/7 Day scheduling, Groups, Scenes and mobile app control and configuration.

## Features

- Suitable for controlling intensity (dimming) and colour of RGB LED strips in 12v and 24v.
- Memory function activated by dip switch to toggle and memorise the status if a power outage occurs
- 2 x separate, optional connection of 3rd-party bell-press/ momentary inputs for simple wall control operation and integration possibilities.
- Compatible with PIXIE Multifunction control, Multifunction remote control, Timer control
- Connect a power repeater to allow extension to the power capacity (extra power supply required) for very long LED runs.

## Electrical

Input	12 - 24V
Min/ Max loads*	12V: 0/180W, 24V: 0/360W
Operating ambient min/max (°C)	-10 to 45°
Typical wireless range	15 metres typical indoors **
IP Rating	IP20

\*\* Depending on building materials and construction.



## PIXIE Smart RGB LED Controller

#LT8915RGBBT



### Related products

PIXIE Multifunction #SMFBTAS



PIXIE Smart LED Controller #LT8915DIMBT




PIXIE Smart Dimmer SDD300BTAM



PIXIE 600W Switch #SWL600BTAM




## Wiring Diagram

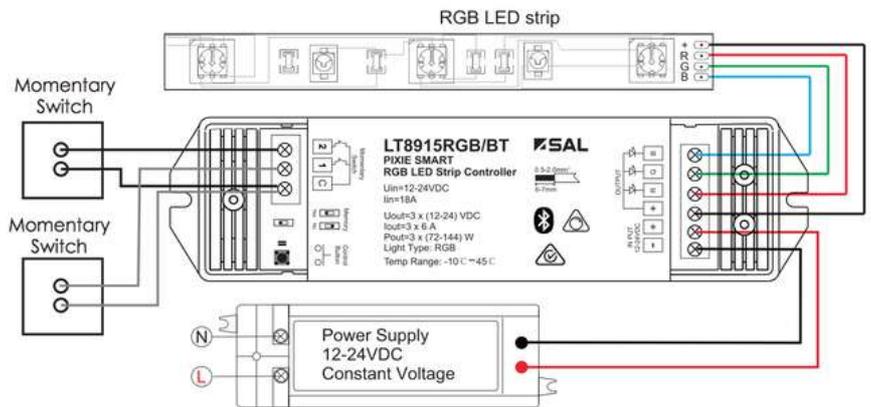

Power supply pictured to be purchased separately as needed to match the connected LED strip load and length.

## Dimensions

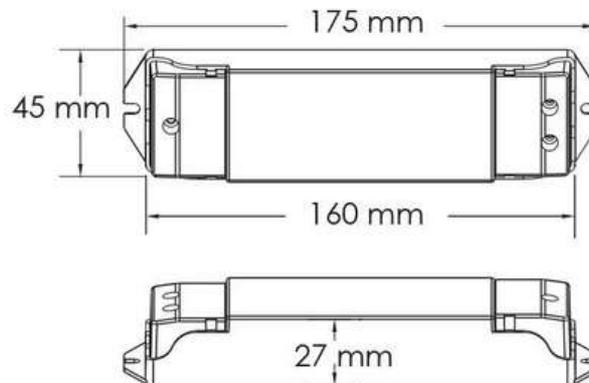

## PIXIE fits in

PIXIE fits in to a huge range of Australian wall plates



SCAN ME



SCAN ME

Download the PIXIE and PIXIE PLUS Apps

