

PIXIE Smart Dimmer

#SDD350BT

 Bluetooth

▶ Basic operation

- 1 click operate lights on/off
- To dim, long press and hold.
- 2 clicks go to maximum output
- 4 clicks manual pairing
- 5 clicks set minimum dim
- 9 clicks rest device

▶ Applications

Residential dwellings for retrofit, renovation and new build; apartments; hotels and hospitality venues.

▶ Whats in the box

1 x Smart dimmer, 1 x silicone adaptor/spacer, 3 x switch caps, 1 x capacitor, installation instructions

▶ Accessories

PIXIE Ambience wall and faceplates in White/Grey/Black



#SDD350BT
PIXIE Smart Dimmer



Push button smart dimmer for lighting control with wireless Bluetooth Mesh Technology in residential, hotel and hospitality spaces. Comes with 24hour/7 Day scheduling, Groups, Scenes and mobile app control and configuration.

Features

- Suitable for dimming LED, tungsten, halogen light sources
- Fit most branded switch plates and PIXIE Ambience plates
- Smart functions and configuration via phone/tablet with PIXIE or PIXIE Plus app
- Memory dimmer function returns to previous dimmed level from off
- Over temperature protection, overload protection, short circuit protection
- Complies with Australian and New Zealand: AS/NZS 60669.2.1
- LED indicator shines bright when the dimmer is on, and faint when the dimmer is off for locating in the dark
- LED indicator can be enabled and disabled through the PIXIE or PIXIE Plus app, when disabled, the indicator is off at OFF state, and lit at ON state

Electrical

| | |
|--------------------------------|------------------------------|
| Power Supply | 220-240VAC |
| Min/ Max loads* | 2W*/350W - 200VA LED |
| Dimming Method | Phase cut - Trailing edge |
| Operating ambient min/max (°C) | 0 to 40° |
| Typical wireless range | 15 metres typical indoors ** |
| IP Rating | IP20 |

*Subject to product capability, this size load may require the inclusion of the LOAD capacitor included in the product carton.
** Depending on building materials and construction.

SCAN ME



Download the PIXIE and
PIXIE PLUS Apps



PIXIE Smart Dimmer

#SDD350BT G2



Related products

PIXIE 350W Switch
#SWL350BT G2



PIXIE Timer Switch
#STS350BT



PIXIE 600W Switch
#SWL600BTAM




PIXIE Multifunction
#SMFBTAS




Wiring Diagram


SDD350BT G2 - Standard wiring diagram

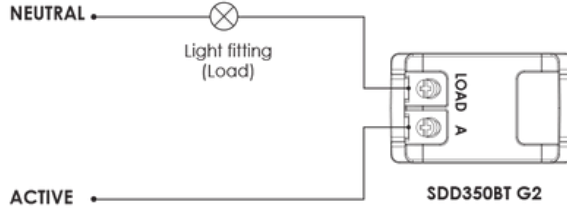

SDD350BT G2 - Optional wiring diagram

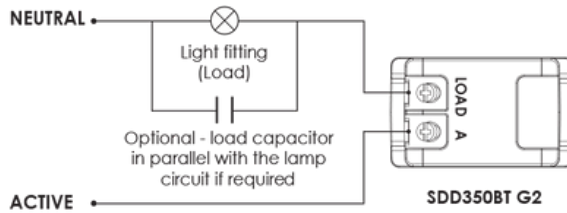

Dimensions

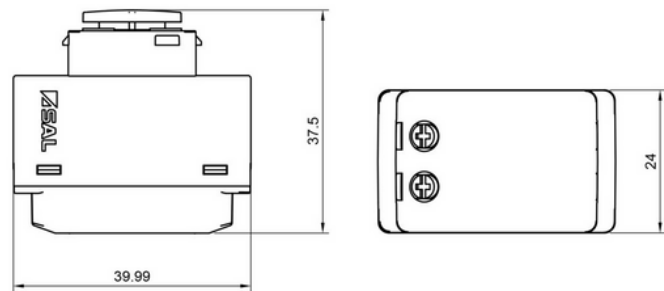

PIXIE fits in

PIXIE fits in to a huge range of Australian wall plates



SCAN ME



SCAN ME

Download the PIXIE and
PIXIE PLUS Apps

